


Flipmatic 801

Shield processing unit

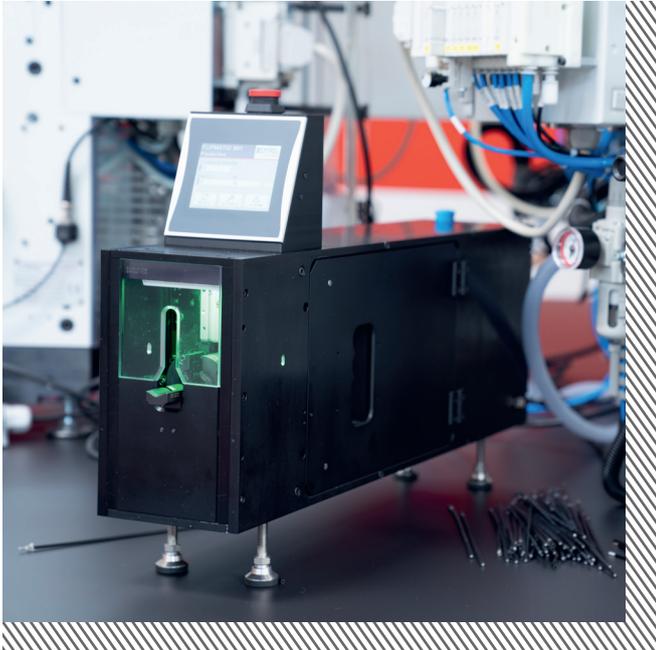

Description

Our Flipmatic 801 is a flexible solution for processing the shield of shielded coaxial cables. The standalone device can be easily set up and operated via touchscreen and is capable of either completely flipping or spreading the shield of a coaxial cable. Program parameters can be stored directly in the unit which enables a faster loading of frequently used settings. Cable variants can be quickly changed using practical inter-

changeable cassettes. The compact design and low weight allow setting up the Flipmatic 801 in places with limited space and being transported with little effort. Ideal for adding a semi-automatic shield processing device to your existing coaxial application.

Technical Data

| | |
|---------------------------|--------------------------|
| Max. insulation diameter: | up to 6 mm |
| Dimensions (LxWxH): | 650 mm x 120 mm x 360 mm |
| Weight: | 18 kg |
| Price: | On request |

More information

www.demirelct.de // info@demirelct.de